

(43) Date of A Publication 15.11.1995

(21) Application No 9509212.8

(22) Date of Filing 05.05.1995

(30) Priority Data

(31) 09400485
08305707

(32) 11.05.1994
14.09.1994

(33) BE
US

(71) Applicant(s)

Jan De Kesel
J B Lombaerdreef 21, B-9810 Drogen, Belgium

(72) Inventor(s)

Jan De Kesel

(74) Agent and/or Address for Service

Brookes & Martin
High Holborn House, 52-54 High Holborn, LONDON,
WC1V 6SE, United Kingdom

(51) INT CL⁶

G03G 15/08, B65D 17/28

(52) UK CL (Edition N)

B6C CBG C168
B8D DCF20

(56) Documents Cited

GB 1243535 A EP 0638851 A EP 0531207 A

(58) Field of Search

UK CL (Edition N) B6C CBG, B8D DCE DCF12 DCF20
DCG
INT CL⁶ B65D 17/28, G03G 15/08
Online: WPI

(54) Seal for a toner cartridge assembly

(57) A seal (2) for a toner cartridge assembly used in printers, copy machines and facsimile machines and preventing the loss of toner from said cartridge assembly during handling and shipment, comprises a layer from which a strip (3) can be torn out, using a tab (4) so as to define an opening (7) for the passage of toner with respect to the part of the layer which has not been torn out. The strip (3) is provided at its first end part (5) with a recess or slits (11) for lowering the tearing force required when starting to tear the strip (3). The strip can be combined in an assembly (figure 9) which can be glued to a cartridge.

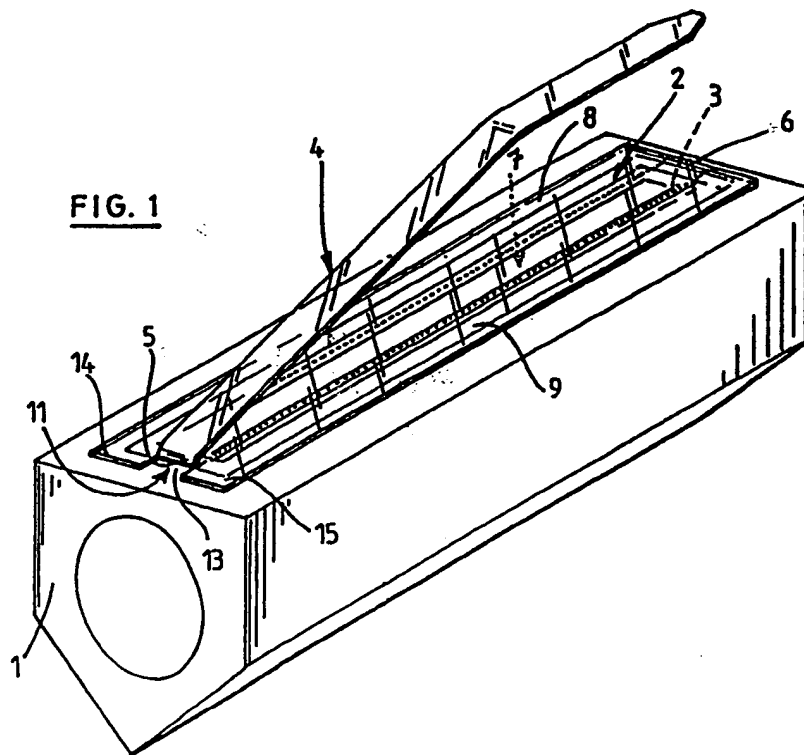


FIG. 1

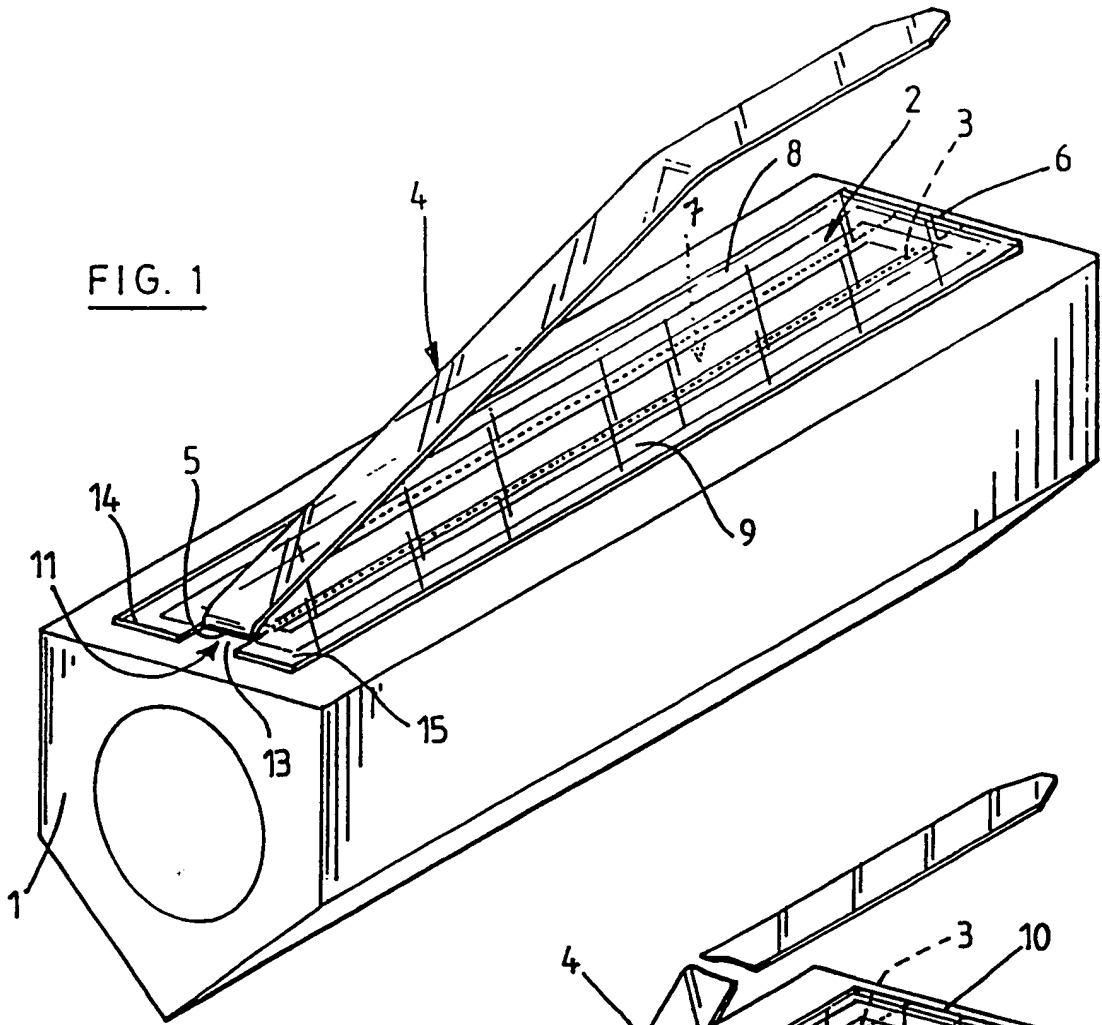


FIG. 2

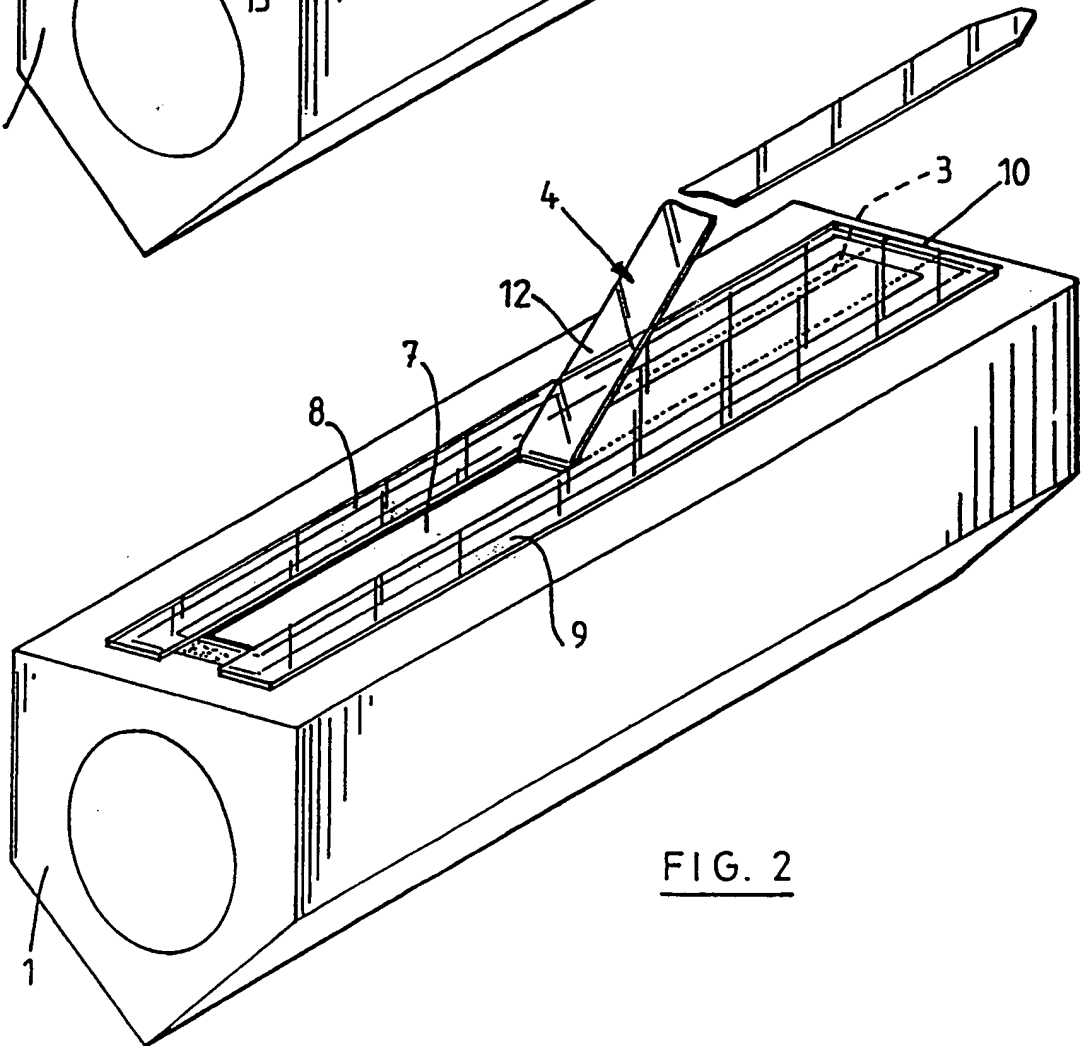


FIG. 3

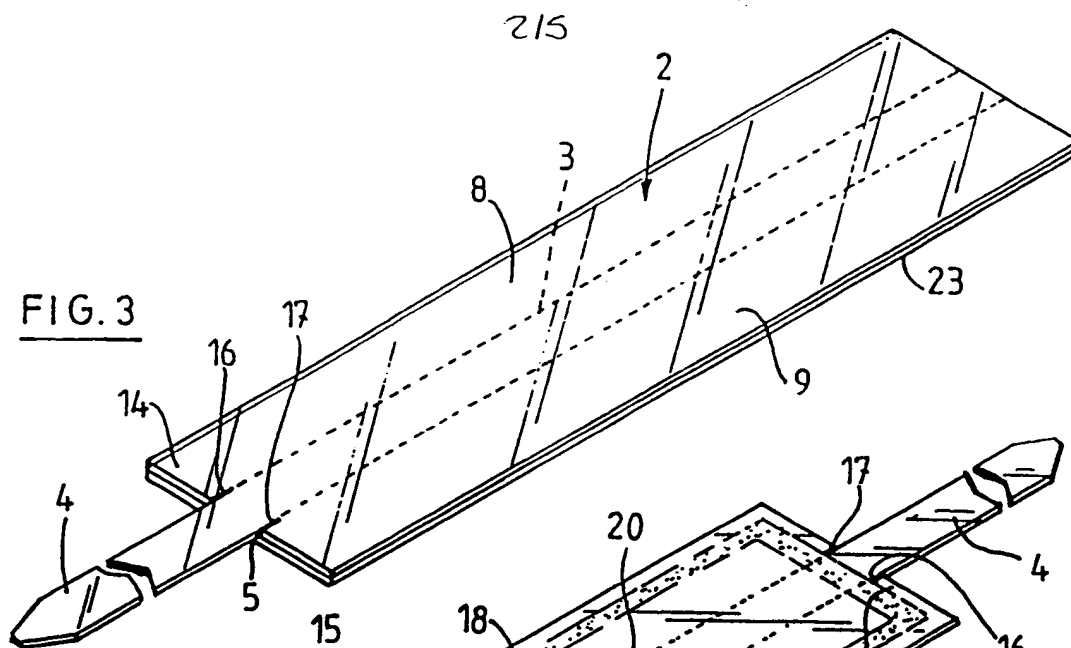


FIG. 4

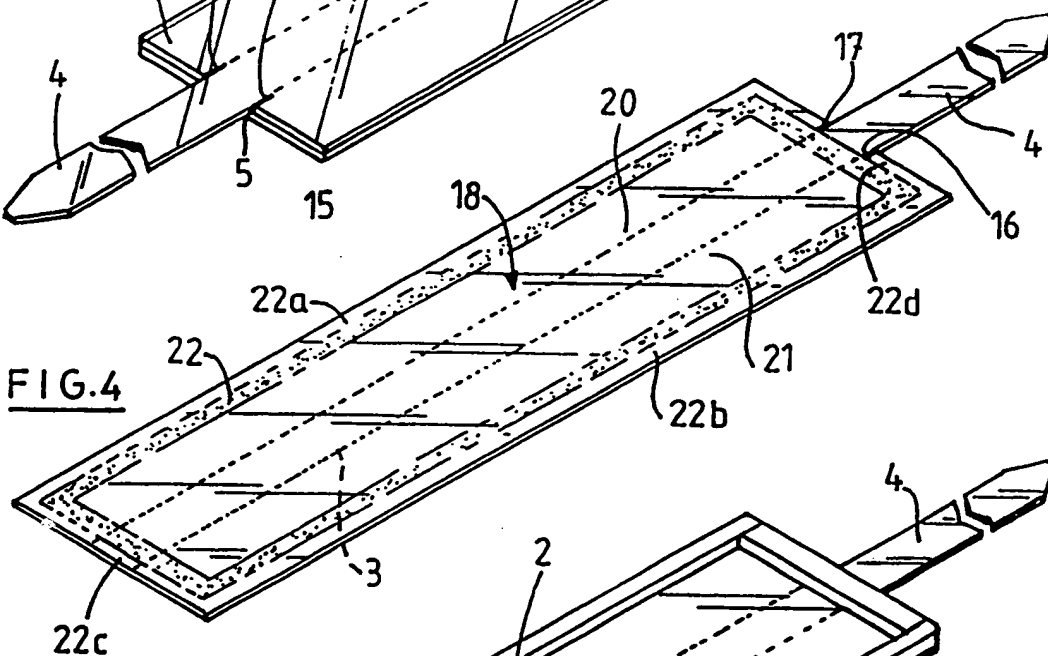


FIG. 5

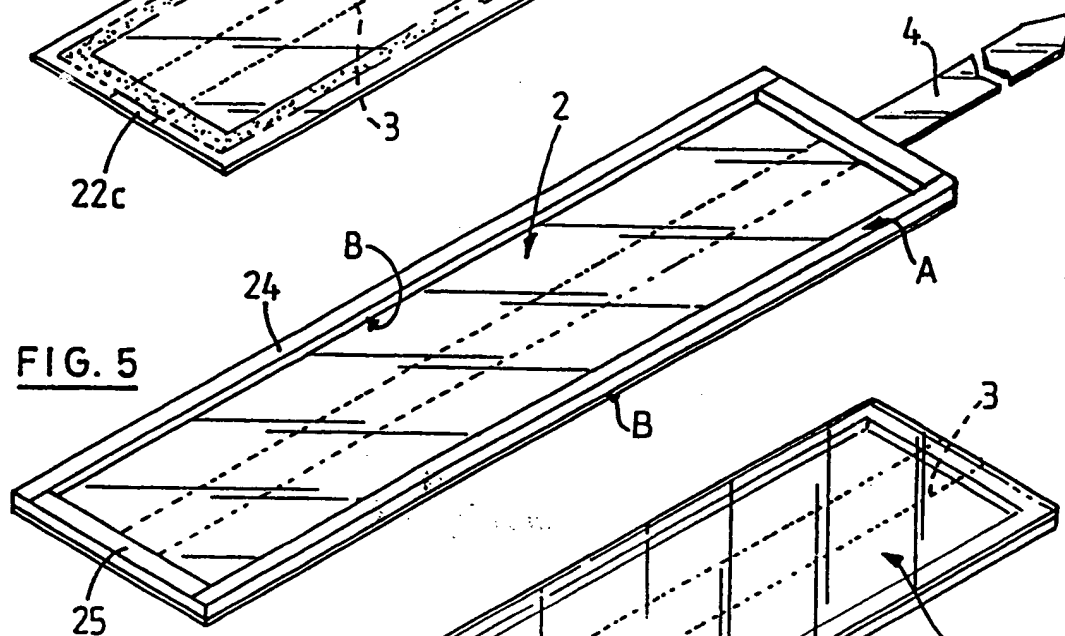
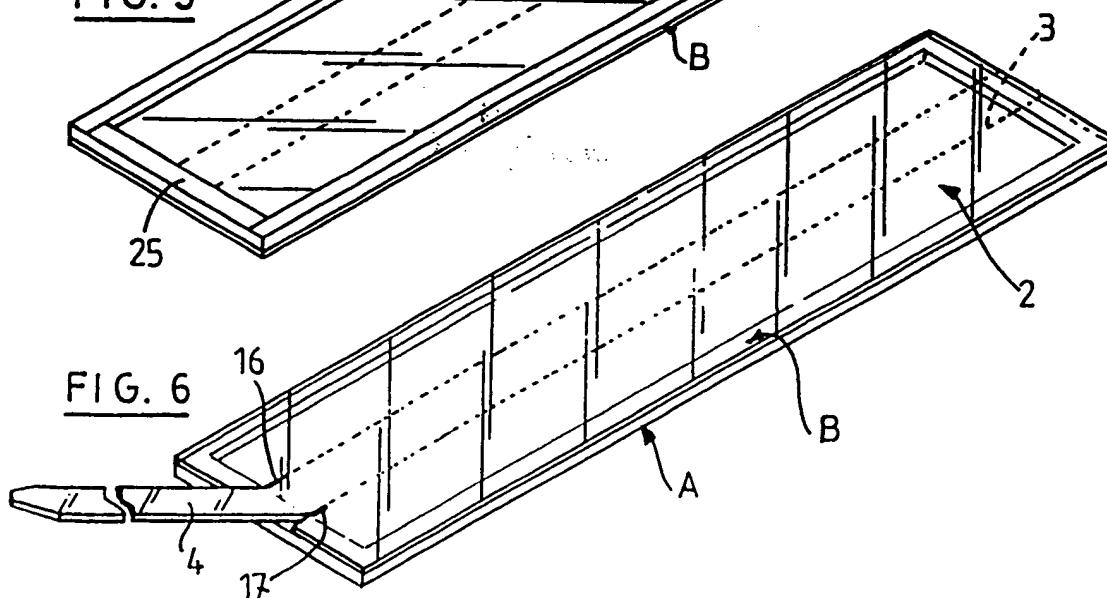


FIG. 6



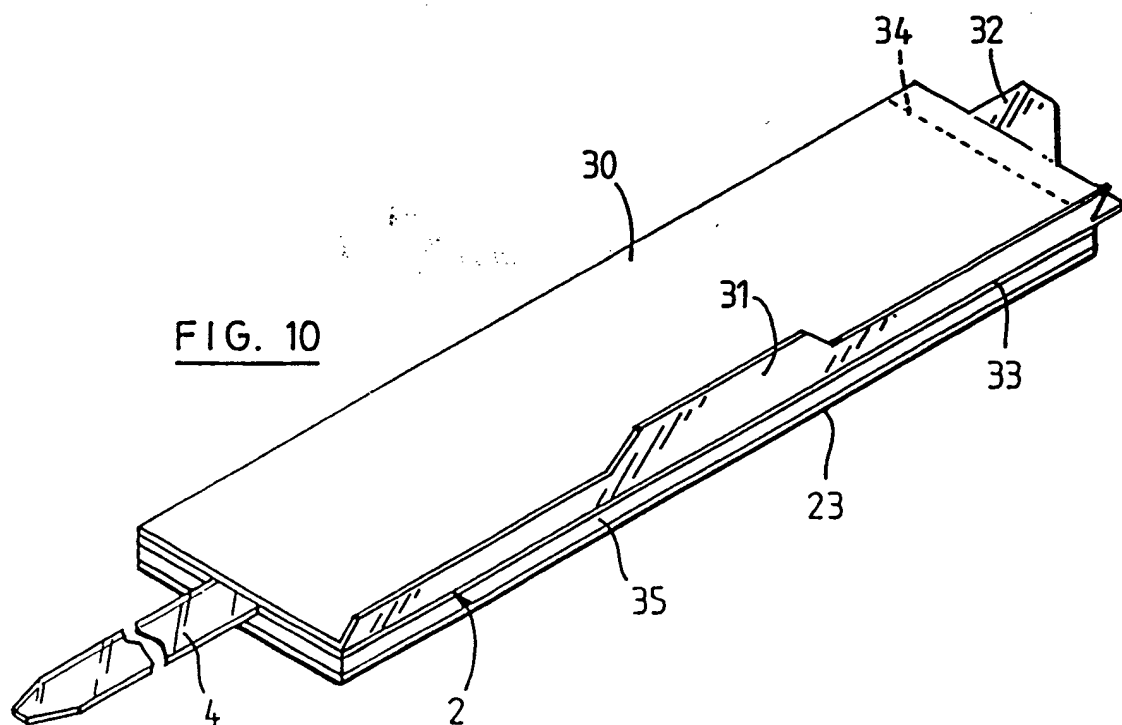
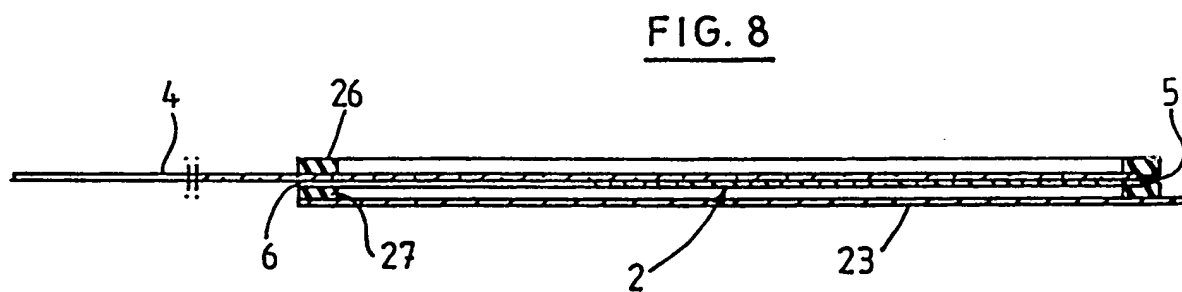
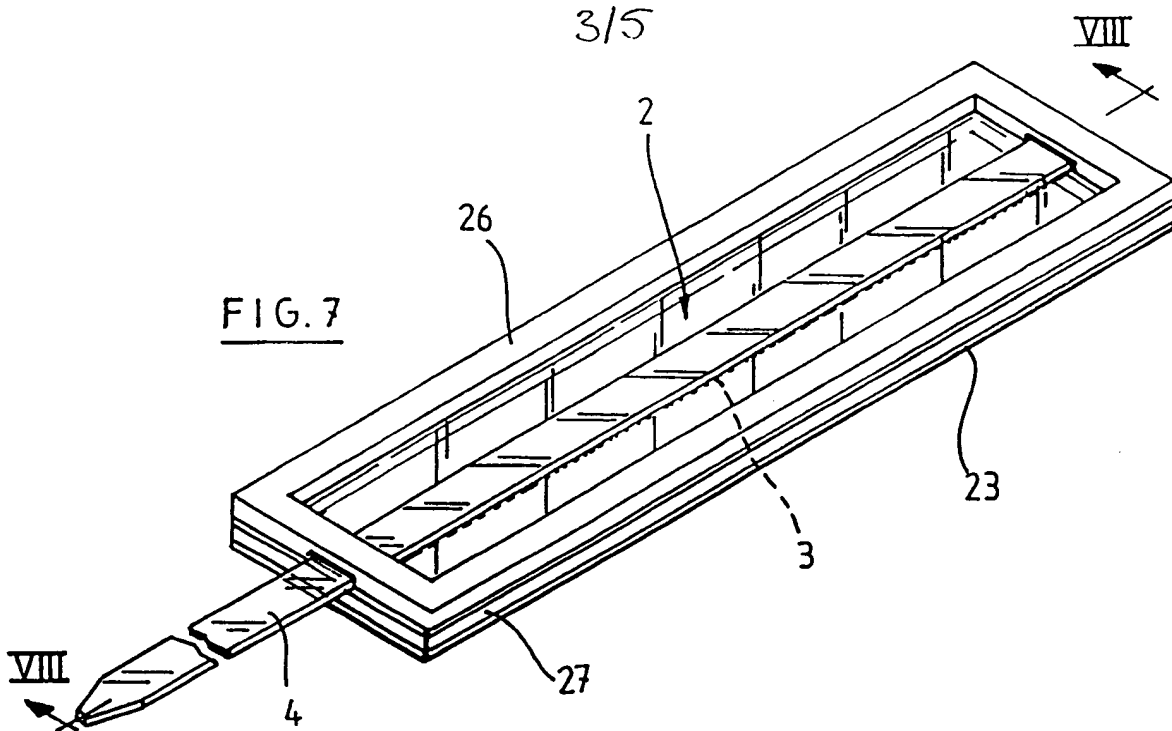


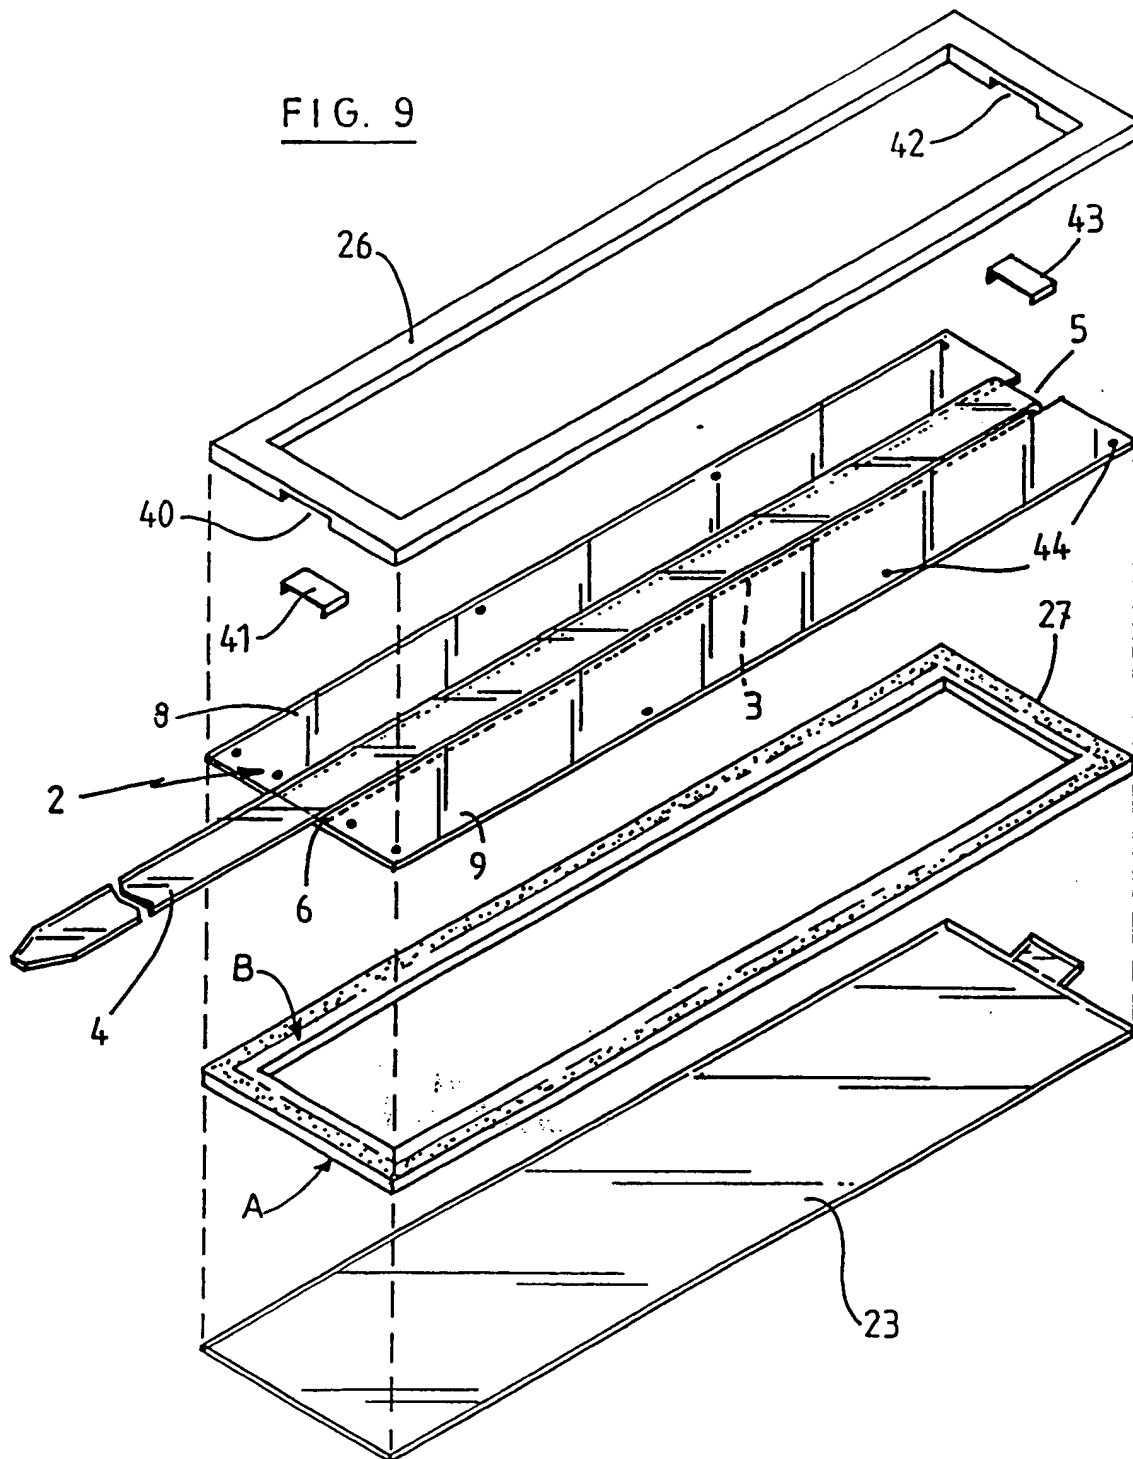
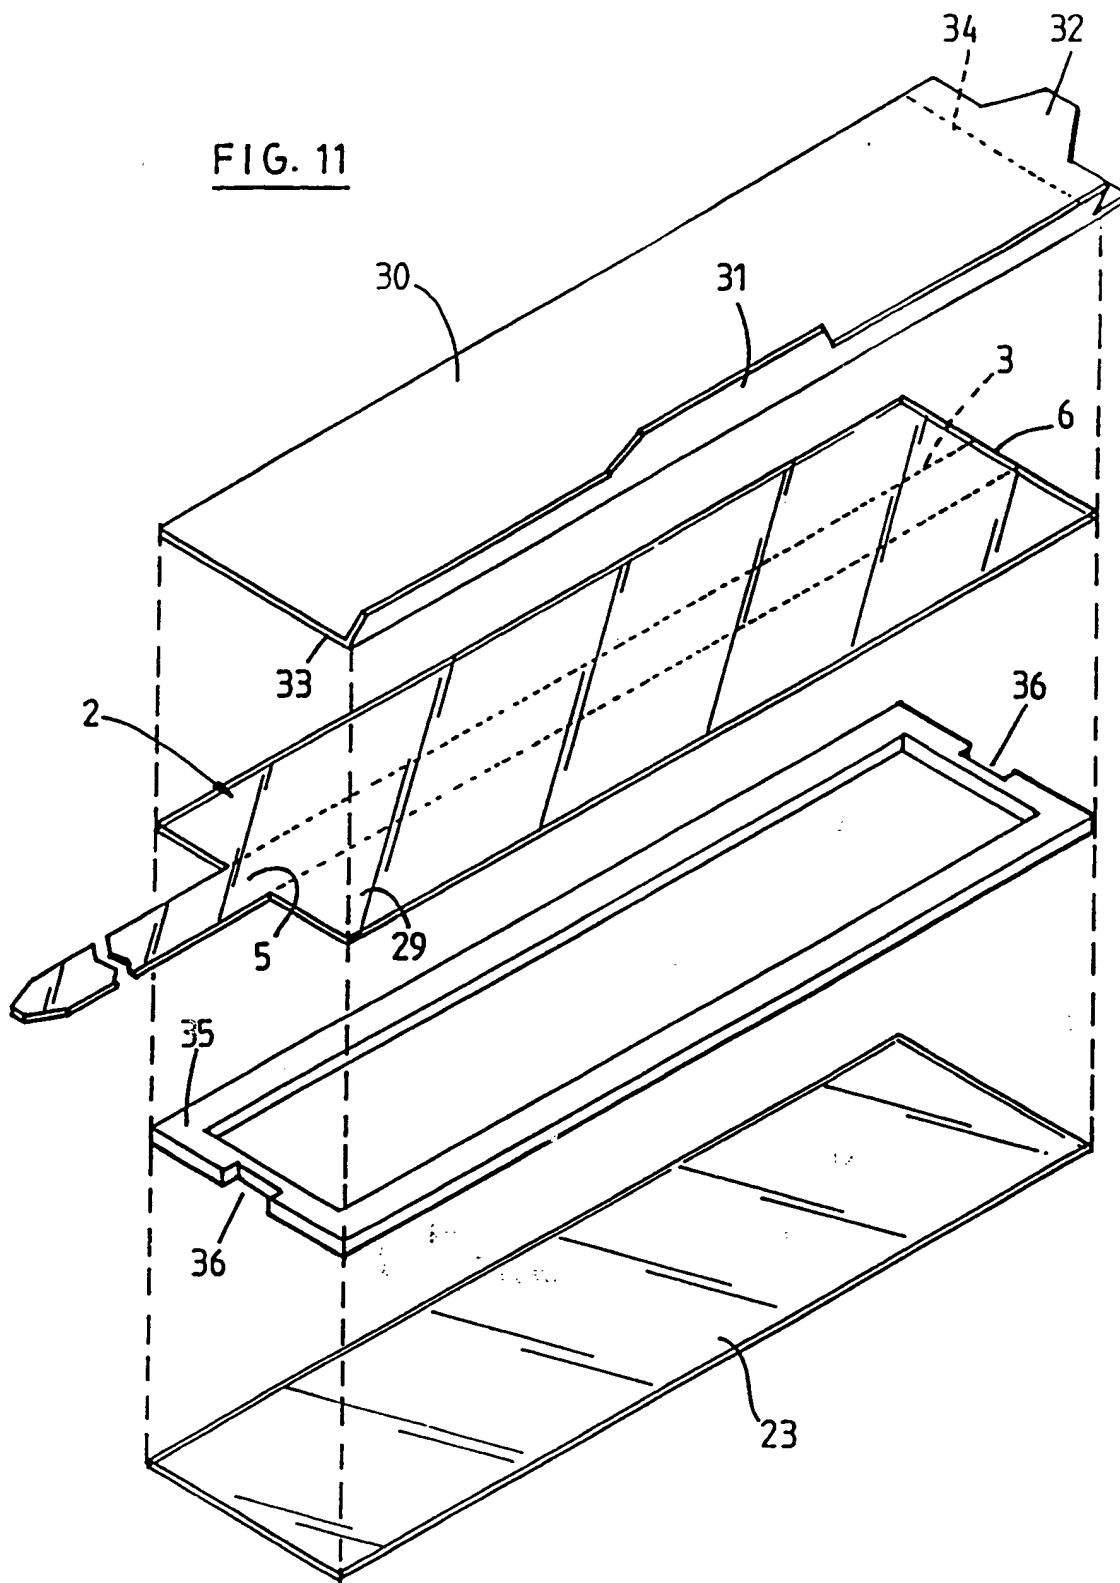
FIG. 9

FIG. 11

SEAL FOR A TONER CARTRIDGE ASSEMBLY

The present invention relates to a seal for a toner cartridge assembly used in printers, copy machines and facsimile machines. Said seal comprises a strip which can be torn out so as to define an opening for the passage of toner. The strip is advantageously provided with a means lowering the tearing force required when starting to tear the strip with respect to the tearing force required for tearing other part of the seal or the seal is provided with a means intended to increase the binding of parts of the seal adjacent to the strip on the cartridge.

Seals in the form of a film comprising a strip which can be torn out have already been used in toner cartridge assembly of printers, copy machines and facsimile machines.

Such seals are preferred with respect to the seals disclosed in US 5,296,902 as in the latter seals, it is necessary to manufacture slotted seal inserts having a slot with very accurate dimensions. Furthermore, the film closing the slot is glued to the insert, whereby when peeling the film away from the slot, said slot can be damaged if the insert is not sufficiently rigid. The seals according to this US patent are seals used to permit the recharging of a toner cartridge.

Seals in the form of a film comprising a strip which can be torn out are often used for new cartridges,

i.e. not for recharging toner cartridges. Recently, Applicant has proposed a seal of this kind suitable for recharging toner cartridges.

5 The major drawback of this kind of seals is that when tearing the strip, there is a risk that the film is also partly torn out and extends into the passage of toner.

10 The present invention relates to an improved seal for a new toner cartridge assembly as well for a re-used toner cartridge, i.e. a re-charged cartridge, said seal preventing the risk of incorrect tearing of the existing seals.

15 The invention relates to a seal for a toner cartridge assembly used in printers, copy machines and facsimile machines and preventing the loss of toner from said cartridge assembly during handling and shipment. The seal comprises a layer from which a strip can be torn out so as to define an opening for the passage of toner with respect to the part of the layer which has
20 not been torn out. The layer is preferably unperforated in its parts intended to define the passage for the toner or in its part intended to close the passage of toner out of the cartridge. Said strip is linked to an element to be pulled for tearing out the strip from a
25 first end part of the strip up to another end part of said strip, whereby when the first end part of the strip is not torn, the strip prevents the loss or leakage of toner from the cartridge, while when the strip is torn up to its other end part, the opening for the passage of
30 toner is formed. According to the invention :

* the strip is provided at its first end part with a means lowering the tearing force required when starting to tear the strip with respect to the tearing force required for tearing other parts of
35 the seal, or

* the part or parts of the seal adjacent to said first end are provided with a means intended to increase the binding or linking of said part or parts of the seal on the cartridge.

5 The seal has advantageously edges intended to be attached by linking means, such as glue, to the toner cartridge.

 Preferably, said first end part of the strip is at least partly intended to be attached by a linking means, such as glue, to the toner cartridge.

10 According to an embodiment, the seal has edges or lateral parts adjacent to said edges intended to be attached by linking means to the toner cartridge, while said first end part of the strip is at least partly intended to be attached by a linking means to the toner cartridge, said means for lowering the tearing force extending at most in the end part of the strip intended to be attached by a linking means to the toner cartridge.

20 According to a first embodiment the means for lowering the tearing force extending at most in the end part of the strip intended to be attached by a linking means to the toner cartridge. Said means for lowering the tearing force consists of at least one aperture situated between the strip to be torn and a part of the seal which has not to be torn.

25 According to a second embodiment, the means for lowering the tearing force consists of two rows of holes, preferably two substantially parallel rows of holes, between which the first end part of the strip is located, whereby said rows are situated between parts of the strip to be torn and parts of the seal which have not to be torn. Said rows of holes extend preferably on a distance of at most 1 cm, most preferably of 0.5 cm

from a free edge of the seal or from the end of the strip adjacent to the pulling element.

According to a third embodiment, the means for lowering the tearing force consists of two cuttings, preferably two parallel cuttings, between which the first end part is located, whereby said cuttings are situated between a part of the strip to be torn and parts of the seal which have not to be torn. Said cuttings extend preferably on a distance of at most 1 cm, more preferably of 0.5 cm from a free edge of the seal or from the end of the strip adjacent to the pulling element.

According to a fourth embodiment, the means for lowering the tearing force consists of two grooves, advantageously parallel grooves, between which the first end part is located, whereby said grooves are situated between a part of the strip to be torn and parts of the seal which have not to be torn. Said grooves extend preferably on a distance of at most 1 cm, more preferably of 0.5 cm from a free edge of the seal or from the end of the strip adjacent to the pulling element.

According to a preferred embodiment, the means for lowering the tearing force consists of :

- an opening situated adjacent to said first end and between two parts of the seal which have not to be torn, or
- an opening situated adjacent to said first end and between two parts of the seal which are intended to be attached by a linking means on the toner cartridge.

For the seal according to the invention which comprises part or parts adjacent to the first end of the strip provided or intended to be provided with a means for increasing the binding or linking of said part or

parts of the seal on the cartridge, said means can be for example :

- * a glue with higher adhesive force than the glue used for attaching other parts of the seal to the cartridge,
- * a foam layer pressing said part or parts on the cartridge, so that said part or parts are more pressed on the cartridge than said first end of the strip,
- * a foam layer acting on said part or parts so as to press it or them on the cartridge, while not pressing the first end of the strip on the cartridge,
- * leg or legs linked to the seal in the neighbourhood of the first end part of the strip, said leg or legs being intended to be attached or linked to the toner cartridge.

The invention relates also to a toner cartridge assembly used in printers, copy machines and facsimile machines. The cartridge is provided with a seal for preventing the loss or leakage of toner from said cartridge assembly during handling and shipment. The seal is a seal according to the invention as disclosed herebefore or possibly hereafter. The seal comprises a layer from which a strip can be torn out so as to define an opening for the passage of toner with respect to the part of the layer which has not been torn out, said strip being linked to an element to be pulled for tearing the strip from a first end part of which up to another end part of which, whereby when the first end part of the strip has not been torn, the strip prevents the loss or leakage of toner from the cartridge, while when the strip has torn up to its end, the opening for the passage of toner is formed.

The strip is provided at its first end part with a means lowering the tearing force required when starting to tear the strip with respect to the tearing force required for tearing other part of the seal,
 5 or the part or parts of the seal adjacent to said first end are provided with a means intended to increase the binding or linking of said part or parts of the seal on the cartridge.

Advantageously, the seal of the toner
 10 cartridge has edges or lateral parts adjacent to said edges attached by linking means on the toner cartridge, while said first end part of the strip is at least partly attached by a linking means to the toner cartridge, said means for lowering the tearing force
 15 extending at most in the end part of the strip attached by a linking means, such as glue, to the toner cartridge.

The means for lowering the tearing force consists for example of :

20 at least one aperture situated between the strip to be torn and a part of the seal which has not to be torn ;

two rows of holes between which the first end part of the strip is located, whereby said rows are situated
 25 between parts of the strip to be torn and parts of the seal which have not to be torn ;

two cuttings between which the first end part is located, whereby said cuttings are situated between a part of the strip to be torn and parts of the seal which
 30 have not to be torn ;

two grooves between which the first end part is located, whereby said grooves are situated between the strip to be torn and parts of the seal which have not to be torn ; or preferably

an opening situated adjacent to said first end and between two parts of the seal which have not been torn.

According to an embodiment of the seal of the invention, at least one face of the part of the layer
5 not intended to be torn out is at least partly provided with a glue layer for attaching it to the toner cartridge. Preferably, said first end part of the strip is also at least partly provided with a glue layer for attaching it to the toner cartridge.

10 According to a further embodiment, at least one face of the part of the layer not intended to be torn out is at least partly provided with glue for attaching it to a slotted support intended to be attached to the toner cartridge. In said embodiment,
15 said first end part of the strip is also for example at least partly linked by means of a glue layer to the slotted support. Preferably, the other end of the strip is also glued to the slotted support. Preferably the glue used for attaching said first end has a lower
20 binding force than that of the glue used for attaching parts of the layer which have not to be torn out.

A face of the seal can also be provided with a foam layer intended to be linked to the toner cartridge, or can be provided at least along two
25 opposite lateral and preferably along its cross edges, with foam, said foam being intended to be attached to the toner cartridge by means for example of glue.

Advantageously, the two opposite faces of the seal are provided at least along two opposite lateral
30 edges with foam, said seal being intended to be placed between a toner cartridge and a support for a toner roller. This embodiment is suitable for being used for the re-charging of a toner cartridge assembly which requires the separation of the toner cartridge from the
35 toner roller support.

Advantageously, the element to be pulled is engaged between foam, for example a part of a slotted foam insert, and the seal, for example an end of the strip, whereby there is no glue between said part of the foam and the seal or whereby there is a means between
5 said part of the foam and the seal or the pulling element, such as a bridge for facilitating the pulling of the element. Said bridge or means limit or avoid the pressure of the element on the seal due to the foam.

10 The invention relates also to a seal used to permit the re-charging of a toner cartridge of a toner cartridge assembly used in printers, copy machines and facsimile machines. Said seal comprises a layer from which a strip can be torn out so as to define an opening
15 for the passage of toner with respect to the part of the layer which has not been torn out, said strip being linked to an element to be pulled for tearing the strip from a first end part of the strip up to another end part of the strip, whereby when the first end part of
20 the strip is not torn, the strip prevents the loss of toner from the cartridge, while when the strip is torn up to its other end part, the opening for the passage of toner is formed. Said seal is provided on its two opposite faces with a glue layer. A first glue layer
25 being intended to contact the toner cartridge, while the other glue layer is in contact with a substantially rigid support, suitable to place correctly the seal on the toner cartridge, whereby the second glue layer exerts a gluing force between the support and the seal
30 which is lower than the gluing force of the first glue layer between the seal and the toner cartridge, so that after placing the seal, the support can be removed without damaging the seal. Preferably, the seal is a seal according to anyone of the claim 1 to 12.

Preferably, the first glue layer extends along the edges of the seal, whereby a central part of the seal is free of glue.

5 According to a detail of an embodiment, the second glue layer has a first face directed towards the support and a second face directed towards the seal, the gluing force of the first face being higher than the gluing force on the other face.

10 According to another characteristic of an embodiment, the first glue layer is covered by a protective element intended to be removed before the placement of the seal.

15 According to a specific embodiment, the substantially rigid support has a thickness of less than 2 mm, for example comprised between 0.5 and 2 mm.

The invention further relates to a toner cartridge assembly for printers, copy machines and facsimile machines, said cartridge assembly being provided with a seal according to the invention.

20 A further object of the invention is a process for the recycling of a toner cartridge, in which

- preferably the toner roller is removed,
- preferably a protective layer of the first glue layer is removed,
- 25 - the support and the seal are placed so that the seal is directed towards the toner cartridge,
- the seal and the support are pushed onto the toner cartridge so as to close the opening of the toner cartridge (opening through which toner can flow
- 30 from the toner cartridge onto the toner roller) and so that the seal is glued onto the cartridge, and
- preferably the support is removed.

35 Details and characteristics of preferred embodiments according to the invention given as examples only, will be disclosed in the following description.

In these drawings :

- Figure 1 is a perspective view of a cartridge provided with a seal according to the invention ;
- Figure 2 is a perspective view similar to Figure 1 during the tearing out of the strip ;
- Figure 3 is a perspective view of a seal according to the invention with a covering protecting sheet ;
- Figure 4 is a back perspective view of the seal of Figure 3 after removal of the covering protecting sheet ;
- Figures 5 and 6 are perspective views of another embodiment of a seal according to the invention ;
- Figure 7 is a perspective view of a further embodiment of a seal of the invention ;
- Figure 8 is a cross-section view along the line VIII-VIII of Figure 7 ;
- Figure 9 is an exploded view of Figure 7 ;
- Figure 10 is a perspective view of a further embodiment of a seal according to the invention, and
- Figure 11 is an exploded view of the seal of Figure 10.

Figures 1 and 2 show a toner cartridge 1 provided with a seal 2. Said seal 2 is, for example, an unperforated film comprising fibres extending in a direction along which the central strip 3 has to be torn. Said strip 3 can be torn by pulling a tongue 4 from a first end part 5 up to a second end part 6. When the first end part 5 is not torn, the central strip closes on opening 7 through which the toner can pass and therefore prevents the loss or leakage of toner. When the central strip 3 is torn up to the other end 6 and is therefore removed, the opening 7 is formed. In the embodiment shown, the width of the opening 7 is defined by the width of the central strip 3 to be torn.

Lateral strips or parts 8,9 of the seal, i.e. along its lateral edges, are glued on the cartridge. Between the glue lines of the lateral strips 8,9, two cross glue lines extend, a first acting as means for
5 attaching the first end part 5 to the cartridge, while the other acting as means for attaching the lateral edge 10 of the seal adjacent to the second end part 6, and thus the second end part 6.

The first end of the strip is provided with a
10 means 11 for lowering the tearing force when starting to tear the strip 3, for example so that the initial tearing force is lower or equal to the tearing force of part 12 of the strip located above the opening 7.

Said means acts also as means for preventing
15 the tearing of parts of the seal which have not to be torn, thereby preventing parts of the seal which have not to be torn to extend after tearing of the strip within the passage for the toner.

Said means 11 consists of an opening 13
20 adjacent to the first end part 5 and situated between two legs or parts 14,15 of the seal 2 which are at least partly glued on the toner cartridge.

Said legs 14,15 ensure a good adhesion of the seal near the first end part 5 of the strip and prevent
25 the tearing of the lateral strips 8,9 of the seal 2 when tearing the central strip 3. Said legs increase therefore the binding of the seal in the neighbourhood of the first end part.

Advantageously, the tongue 4 is curved at the
30 end part 5, whereby the tearing force is still lowered.

Figures 3 and 4 show a seal of the invention. The seal comprises a plastic film without holes or apertures, but provided with a central strip 3 (defined

on the figure between points 20,21) which, when torn, defines two lateral strips 8,9.

The seal 2 is provided at the first end part 5 of the central strip 3 with two parallel cuttings 16,17. Said cuttings 16,17 are situated between a part of the central strip which is intended to be glued on the cartridge and end parts 14,15 of the seals, i.e. after tearing the end parts 14, 15 of the lateral strips.

The seal 2 is provided, on one (18) of its faces, with glue 22 defining a rectangular path and with a protective sheet 23 which has first to be peeled off so as to attach the seal on a cartridge by means of the glue 22 (lateral lines 22a, 22b and cross lines 22c, 22d).

Figure 4 shows the seal 2 after peeling of the protective sheet 23. As it can be seen from said Figure, the two parallel cuttings extend at most in the end part of the central strip 3 intended to be glued on the cartridge. The cuttings extend thus not through the glue (22d) from one lateral edge to the other lateral edge.

Figures 5 and 6 show another embodiment of a seal according to the invention.

Said seal 2 in the form of a film comprises a central longitudinal strip 3 and foam elements 24,25 located along the edges of the seal 2. The central strip 3 is linked to a tongue 4 suitable for the tearing operation. The foam elements are advantageously glued on the film 2. The strip 3 is provided at its end linked to the tongue 4 with cuttings 16,17 as described in the embodiment of Figure 3.

For attaching said seal to a cartridge, it is possible to provide the cartridge with glue and then to apply and press the seal on the cartridge, but

preferably glue is applied on the face A of the foam 24,25 intended to be applied or pressed on the cartridge.

Advantageously, glue is applied on opposite
5 faces A,B of the foam elements and the seal is provided with a protective sheet to be peeled off before using the seal. The glue layer (face B) located between the seal 2 and the foam elements 24,25 has a higher adhesive force than that of the glue layer located on the face A
10 of the foam 24,25 intended to be pressed or applied on the cartridge.

More preferably, the foam has a sufficient strength or mechanical property so that when a cartridge has to be re-used, it is possible to remove the
15 remaining parts of the seal and the foam together, for example by applying a sufficient tearing or pulling force, without breaking the foam in two parts (i.e a part still attached to the toner cartridge and a part removed with the remaining parts of the seal).

20 Figures 7 and 8 show a further embodiment of a seal 2 according to the invention. Said seal 2 consists of a film 2 with a central strip 3 which can be torn by pulling a tongue 4. The end part 5 of the central strip 3 is similar to that shown in Figure 1.

25 The opposite faces of the film 2 are provided with a slotted foam insert 26,27 for example by means of a layer of glue.

The tongue 4 is curved at the end part 5 of the central strip 3 and extends along the upper face of
30 the film (i.e. the face not intended to be directed towards the inner volume of the cartridge) and then between the other end 6 of the central strip 3 and the foam insert 26, before extending outside of the seal.

The foam insert 27 has a face provided with a
35 glue layer covered with a protective sheet 23 intended

to be peeled off before attaching the foam insert to a toner cartridge.

As it can be seen from Figure 9, the tongue 4 passes through an opening 40 located between the slotted
5 foam insert 26 and the seal near the end 6 of the central strip 3. Advantageously a rigid bridge 41 can be placed in said opening so as to avoid that the foam 26 exerts a force on the element or tongue 4. In order
10 to avoid any force due to the foam on the element or tongue 4, the foam insert 26 can possibly be cut so that no foam remains above the central strip 3, i.e. on the face not intended to be directed towards the cartridge.

As the seal of Figure 10 is intended to be placed between a toner cartridge and a support for a
15 toner roller, the foam inserts 26,27 are pressed and therefore exert a force on the seal. Due to the bridge 41, or a lack of glue between the strip and the foam layer, the lateral parts or strips 8,9 of the seal 2 are pressed against the toner cartridge whereby the binding
20 force of said parts (i.e. parts which are not intended to be torn off) on the toner cartridge is higher than the binding force of the strip on the cartridge.

In the embodiment shown, which is a preferred one, the end of the tongue adjacent to the first end
25 part 5 of the strip is curved and extends in a recess or opening 42 of the slotted foam support or insert 26 so as to limit or avoid that the foam insert 26 exerts a force on the central strip 3 or on the tongue 4. A bridge 43 can be used as explained for the opening 40.

30 The slotted foam insert 26 is provided with glue only on its face directed towards the seal 2. Said glue is only located at a few points 44 as only a few binding points are sufficient.

The foam insert 27 is provided on both faces A, B with a continuous glue layer, i.e. a layer extending along the peripheral edges of the foam.

Such a seal is especially suitable for recycling toner cartridge assembly in which the toner cartridge needs to be separated from a support of a toner roller (for example toner cartridge assembly of the type NX Engine Canon, HP 3 SI, HP 4 SI).

Figures 10 and 11 show an embodiment similar to that of Figure 5, except that

- the face 29 of the seal not intended to be directed towards the inner volume of the cartridge is provided with a rigid support 30, for example a cardboard support ;
- there is a peelable protective sheet 23 of the glue layer intended for attaching the slotted foam insert 35 to the cartridge ;
- there are two recesses 36 in the foam insert, said recesses being located adjacent to the first end 5 of the central strip 3 and to the other end 6 of the central strip 3, whereby the tearing of the strip is facilitated at the beginning and the end of the tearing operation.

The cardboard support is suitable for the placement (after removal of the peelable or protective sheet 23) of the seal 2 on a cartridge. Said support 30 has advantageously one or two parts 31,32 which can be folded (folding lines 33,34), so as to give more rigidity to the support and so as to facilitate the placement or the removal of the support after placement of the seal. Preferably the two parts which are able to be folded are located along two lateral edges of the seal. The support 30 is provided with a glue layer for linking or attaching the seal 2 thereon. Said glue layer has a gluing force which is lower to the gluing

force of the glue layer for attaching the seal 2 to the toner cartridge.

C L A I M S

1. A seal (2) for a toner cartridge assembly used in printers, copy machines and facsimile machines and preventing the loss of toner from said cartridge assembly during handling and shipment, said seal (2) comprising a layer from which a strip (3) can be torn out so as to define an opening (7) for the passage of toner with respect to the part of the layer which has not been torn out, said strip (3) being linked to an element (4) to be pulled for tearing the strip (3) from a first end part (5) of the strip up to another end part (6) of the strip, whereby when the first end part (5) of the strip is not torn, the strip (3) prevents the loss of toner from the cartridge, while when the strip (3) is torn up to its other end part (6), the opening (7) for the passage of toner is formed, whereby the strip (3) is provided at its first end part (5) with a means (11) lowering the tearing force required when starting to tear the strip (3) with respect to the tearing force required for tearing another part of the strip.

20

2. A seal according to claim 1, characterized in that the layer (2) is unperforated in its part intended to close the passage of toner out of the cartridge, whereby at least one aperture is situated between the strip (3) to be torn and a part (8,9) of the seal which has not to be torn, said aperture being adjacent to the first end part (5) of the strip (3).

25

3. A seal according to claim 1 or 2, characterized in that a part (14,15) of the seal adjacent to the first end part (5) of the strip (3) and which is not intended to be torn is provided with a

30

means intended to increase the binding of said part of the seal on the cartridge.

4. A seal according to anyone of the claims 1 to 3, characterized in that the seal has lateral parts (8,9) intended to be attached by linking means to the toner cartridge.

5. A seal according to claim 4, characterized in that said first end part (5) of the strip (3) is at least partly intended to be attached by a linking means to the toner cartridge.

6. A seal according to claim 5, characterized in that said means (11) for lowering the tearing force extends at most in the end part (5) of the strip (3) intended to be attached by a linking means to the toner cartridge.

7. A seal according to claim 5 or 6, characterized in that said means (11) for lowering the tearing force consists of :

- at least one aperture (13) situated between the strip (3) to be torn and a part (8,9) of the seal which has not to be torn, or

- two rows of holes between which the first end part (5) of the strip (3) is located, whereby said rows are situated between parts of the strip to be torn and parts of the seal which have not to be torn, or

- two cuttings (16,17) between which the first end part (5) is located, whereby said cuttings (16,17) are situated between a part of the strip to be torn and parts (8,9) of the seal which have not to be torn, or

- two grooves between which the first end part is located, whereby said grooves are situated between a

part of the strip to be torn and parts of the seal which have not to be torn, or

- an opening (13) situated adjacent to said first end (5) and between two parts (8,9) of the seal which have
5 not to be torn, or

- an opening situated adjacent to said first end and between two parts of the seal which are intended to be attached by a linking means on the toner cartridge.

10 8. A seal according to any one of the preceding claims, characterized in that at least one face of the part (8,9) of the layer not intended to be torn out is at least partly provided with a glue layer (22) for
15 attaching it to the toner cartridge or to a slotted support intended to be attached to the toner cartridge.

9. A seal according to claim 8, characterized in that said first end part (5) of the strip is at least partly provided with a glue layer (22d) for attaching it
20 on the toner cartridge or to a slotted support intended to be attached to the toner cartridge.

10. A seal according to claim 8 or 9, characterized in that a face of the seal is provided
25 with foam or a foam layer (24,25) intended to be linked to the toner cartridge.

11. A seal according to claim 8 or 9, characterized in that the seal is provided on its two
30 opposite faces with a slotted foam insert (26,27), whereby the element (4) to be pulled for tearing is engaged through an opening (40) between a part of a foam insert (26) and the seal (2), said part of the foam being not provided with glue.

12. A seal according to claim 8 or 9, characterized in that the seal is provided on its two opposite faces with a slotted foam insert (26,27), whereby the element (4) to be pulled for tearing is engaged through an opening between a part of a foam insert (26) and the seal (2), a means (41) being located between said part of the foam insert and the seal so as to facilitate the pulling of the element (4).

13. A seal used to permit the re-charging of a toner cartridge of a toner cartridge assembly used in printers, copy machines and facsimile machines, said seal (2) comprising a layer from which a strip (3) can be torn out so as to define an opening (7) for the passage of toner with respect to the part (8,9) of the layer which has not been torn out, said strip (3) being linked to an element (4) to be pulled for tearing the strip from a first end part (5) of the strip up to another end part (6) of the strip, whereby when the first end part (5) of the strip is not torn, the strip prevents the loss of toner from the cartridge, while when the strip is torn up to its other end part (6), the opening (7) for the passage of toner is formed, said seal being linked on the two opposite faces (A,B) to a glue layer, a first glue layer being intended to contact the toner cartridge while the other glue layer is in contact with a substantially rigid support (30), suitable to place correctly the seal (2) on the toner cartridge, whereby the second glue layer exerts a gluing force between the support (30) and the seal (2) which is lower than the gluing force of the first glue layer between the seal and the toner cartridge, so that after placing the seal, the support (30) can be removed without damaging the seal.

14. A seal according to claim 13, characterized in that the first glue layer (22) extends along the edges of the seal, whereby a central part of the seal is free of glue.

5

15. A seal according to claim 13 or 14, characterized in that the second glue layer has a first face directed towards the support and a second face directed towards the seal, the gluing force of the first face being higher than the gluing force on the other face, the first glue layer being preferably covered by a protective element (23) intended to be removed before the placement of the seal.

15 16. A toner cartridge assembly used in printers, copy machines and facsimile machines, said cartridge being provided with a seal for preventing the loss of toner from said cartridge assembly during handling and shipment, said seal being a seal according to anyone of
20 the claims 1 to 12.

Relevant Technical Fields

(i) UK Cl (Ed.N) B6C: CBG. B8D: DCF12, 20; DCG, DCE

(ii) Int Cl (Ed.6) G03G 15/08. B65D 17/28

Databases (see below)

(i) UK Patent Office collections of GB, EP, WO and US patent specifications.

(ii) ONLINE: WPI

Search Examiner
 A DAVEY

Date of completion of Search
 15 JUNE 1995

Documents considered relevant
 following a search in respect of
 Claims :-
 1-12, 16

Categories of documents

- | | |
|--|---|
| <p>X: Document indicating lack of novelty or of inventive step.</p> <p>Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.</p> <p>A: Document indicating technological background and/or state of the art.</p> | <p>P: Document published on or after the declared priority date but before the filing date of the present application.</p> <p>E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.</p> <p>&: Member of the same patent family; corresponding document.</p> |
|--|---|

Category	Identity of document and relevant passages	Relevant to claim(s)
X	GB 1243535 A (OHLER ECKO) note eg Figure 3: container "suitable for" toner	1
A,E	EP 0638851 A (CANON) whole document: note especially Figure 6	
A	EP 0631207 (CANON) see eg Figures 7, 12	